

UT54ACS191/UT54ACTS191

Features

- Single down/up count control line
- Look-ahead circuitry enhances speed of cascaded counters
- Fully synchronous in count modes
- Asynchronously presettable with load control
- 1.2 μ CMOS
 - Latchup immune
- High speed
- Low power consumption
- Single 5 volt supply
- Available QML Q or V processes
- Flexible package
 - 16-pin DIP
 - 16-lead flatpack
- UT54ACS191 - SMD 5962-96564
- UT54ACTS191 - SMD 5962-96565

Description

The UT54ACS191 and the UT54ACTS191 are synchronous 4-bit reversible up-down binary counters. Synchronous counting operation is provided by having all flip-flops clocked simultaneously so that the outputs change coincident with each other when so instructed. Synchronous operation eliminates the output counting spikes associated with asynchronous counters.

The outputs of the four flip-flops are triggered on a low-to-high level transition of the clock input if the enable input (\overline{CTEN}) is low. A logic one applied to \overline{CTEN} inhibits counting. The direction of the count is determined by the level of the down/up (D/\overline{U}) input. When D/\overline{U} is low, the counter counts up and when D/\overline{U} is high, it counts down.


The counters feature a fully independent clock circuit. Changes at control inputs (\overline{CTEN} and D/\overline{U}) that will modify the operating mode have no effect on the contents of the counter until clocking occurs.

The counters are fully programmable. The outputs may be preset to either logic level by placing a low on the load input and entering the desired data at the data inputs. The output will change to agree with the data inputs independently of the level of the clock input. The asynchronous load allows counters to be used as modulo-N dividers by simply modifying the count length with the preset inputs.


Two outputs have been made available to perform the cascading function: ripple clock and maximum/minimum (MAX/MIN) count. The MAX/MIN output produces a high-level output pulse with a duration approximately equal to one complete cycle of the clock while the count is zero (all outputs low) counting down or maximum (15) counting up.

UT54ACS191/UT54ACTS191

Pinouts

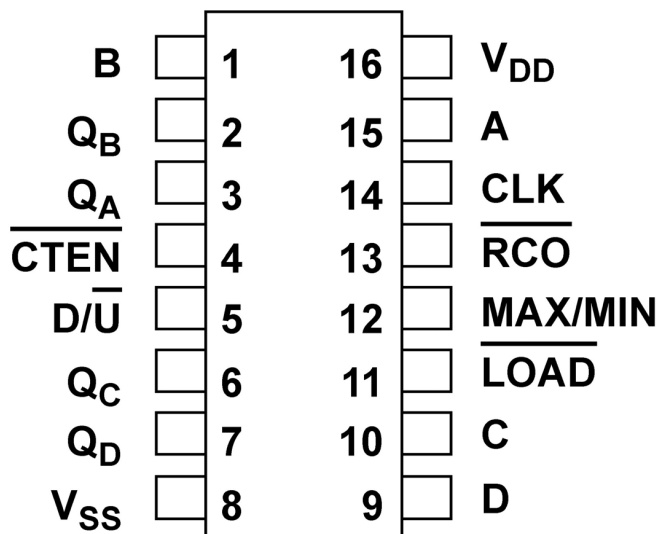

16-Pin DIP
Top View

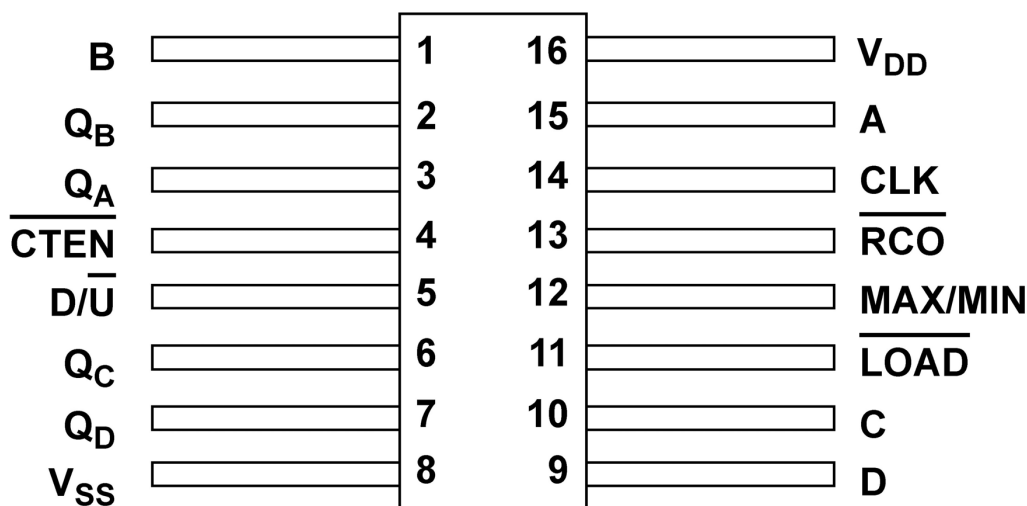

16-Lead Flatpack
Top View

The ripple clock output (\overline{RCO}) produces a low-level output pulse under those same conditions but only while the clock input is low. The counters easily cascade by feeding the \overline{RCO} to the enable input of the succeeding counter if parallel clocking is used, or to the clock input if parallel enabling is used. Use the MAX/MIN count output to accomplish look-ahead for high-speed operation.

The devices are characterized over full military temperature range of -55°C to +125°C.


Synchronous 4-Bit Up-Down Binary Counters

UT54ACS191/UT54ACTS191

Function Table

Function	$\overline{\text{LOAD}}$	$\overline{\text{CTEN}}$	D/ $\overline{\text{U}}$	CLK
Count Up	H	L	L	↑
Count Down	H	L	H	↑
Asynchronous Reset	L	X	X	X
No Change	H	H	X	X

Logic Symbol

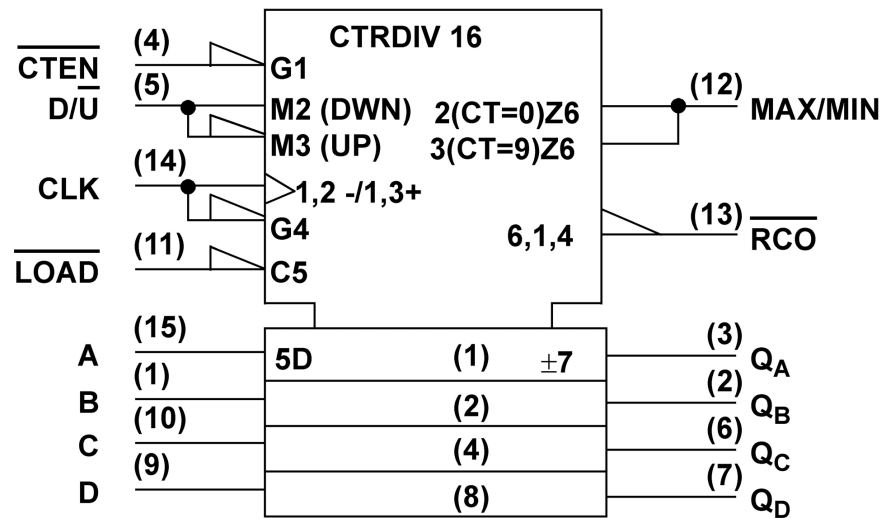


Note:

1) Logic symbol in accordance with ANSI/IEEE standard 91-1984 and IEC Publication 617-12.

UT54ACS191/UT54ACTS191

Logic Diagram

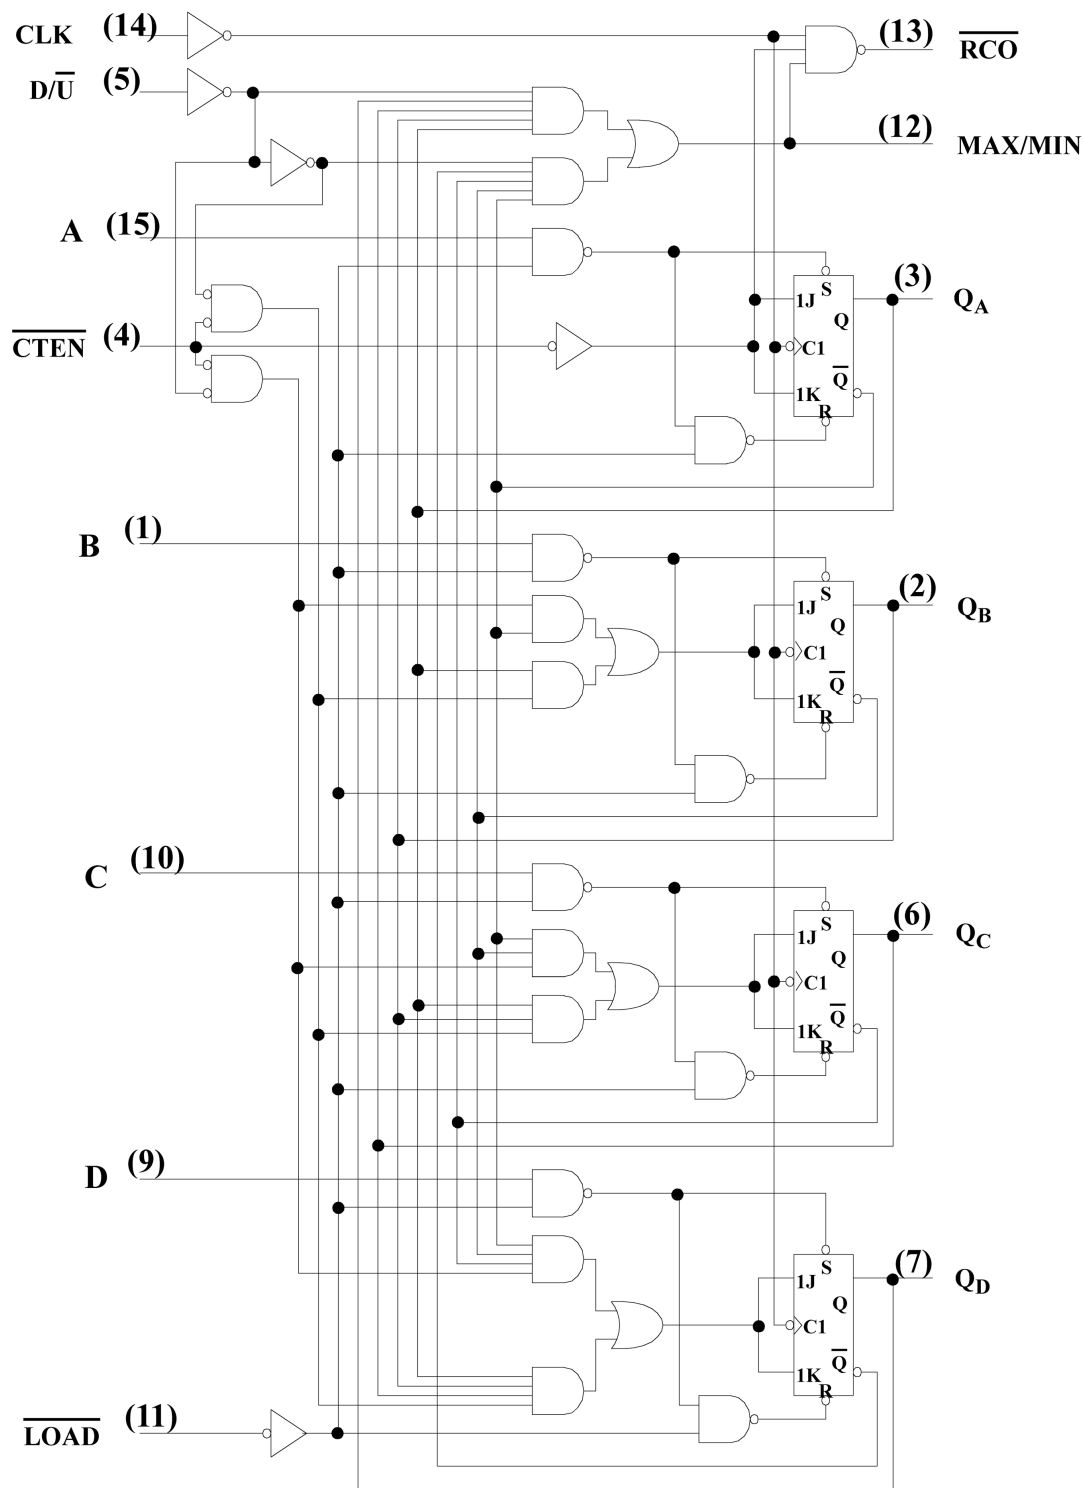

UT54ACS191/UT54ACTS191

Operational Environment ¹

Parameter	Limit	Units
Total Dose	1.0E6	rads(Si)
SEU Threshold ²	80	MeV-cm ² /mg
SEL Threshold	120	MeV-cm ² /mg
Neutron Fluence	1.0E14	n/cm ²

Notes:

- 1) Logic will not latchup during radiation exposure within the limits defined in the table.
- 2) Device storage elements are immune to SEU affects.

Absolute Maximum Ratings

Symbol	Parameter	Limit	Units
V _{DD}	Supply voltage	-0.3 to 7.0	V
V _{I/O}	Voltage any pin	-.3 to V _{DD} +.3	V
T _{STG}	Storage Temperature range	-65 to +150	°C
T _J	Maximum junction temperature	+175	°C
T _{LS}	Lead temperature (soldering 5 seconds)	+300	°C
Θ _{JC}	Thermal resistance junction to case	20	°C/W
I _I	DC input current	±10	mA
P _D	Maximum power dissipation	1	W

Note:

- 1) Stresses outside the listed absolute maximum ratings may cause permanent damage to the device. This is a stress rating only, functional operation of the device at these or any other conditions beyond limits indicated in the operational sections is not recommended. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Limit	Units
V _{DD}	Supply voltage	4.5 to 5.5	V
V _{IN}	Input voltage any pin	0 to V _{DD}	V
T _C	Temperature range	-55 to + 125	°C

UT54ACS191/UT54ACTS191

DC Electrical Characteristics ⁷

($V_{DD} = 5.0V \pm 10\%$; $V_{SS} = 0V$ ⁶, $-55^{\circ}C < T_c < +125^{\circ}C$); Unless otherwise noted, T_c is per the temperature range ordered.

Symbol	Parameter	Condition	MIN	MAX	Unit
V_{IL}	Low-level input voltage ¹ ACTS ACS			0.8 .3 V_{DD}	V
V_{IH}	High-level input voltage ¹ ACTS ACS		.5 V_{DD} .7 V_{DD}		V
I_{IN}	Input leakage current ACTS/ACS	$V_{IN} = V_{DD}$ or V_{SS}	-1	1	μA
V_{OL}	Low-level output voltage ³ ACTS ACS	$I_{OL} = 8.0mA$ $I_{OL} = 100\mu A$		0.40 0.25	V
V_{OH}	High-level output voltage ³ ACTS ACS	$I_{OH} = -8.0mA$ $I_{OH} = -100\mu A$.7 V_{DD} $V_{DD} - 0.25$		V
I_{OS}	Short-circuit output current ^{2, 4} ACTS/ACS	$V_O = V_{DD}$ and V_{SS}	-200	200	mA
I_{OL}	Output current ¹⁰ (Sink)	$V_{IN} = V_{DD}$ or V_{SS} $V_{OL} = 0.4V$	8		mA
I_{OH}	Output current ¹⁰ (Source)	$V_{IN} = V_{DD}$ or V_{SS} $V_{OH} = V_{DD} - 0.4V$	-8		mA
P_{total}	Power dissipation ^{2, 8, 9}	$C_L = 50pF$		2.1	mW/ MHz
I_{DDQ}	Quiescent Supply Current	$V_{DD} = 5.5V$		10	μA
ΔI_{DDQ}	Quiescent Supply Current Delta ACTS	For input under test $V_{IN} = V_{DD} - 2.1V$ For all other inputs $V_{IN} = V_{DD}$ or V_{SS} $V_{DD} = 5.5V$		1.6	mA
C_{IN}	Input capacitance ⁵	$f = 1MHz$ @ 0V		15	pF
C_{OUT}	Output capacitance ⁵	$f = 1MHz$ @ 0V		15	pF

UT54ACS191/UT54ACTS191

Notes:

- 1) Functional tests are conducted in accordance with MIL-STD-883 with the following input test conditions: $V_{IH} = V_{IH(min)} + 20\%$, -0% ; $V_{IL} = V_{IL(max)} + 0\%$, -50% , as specified herein, for TTL, CMOS, or Schmitt compatible inputs. Devices may be tested using any input voltage within the above specified range, but are guaranteed to $V_{IH(min)}$ and $V_{IL(max)}$.
- 2) Supplied as a design limit but not guaranteed or tested.
- 3) Per MIL-PRF-38535, for current density $\leq 5.0E5$ amps/cm², the maximum product of load capacitance (per output buffer) times frequency should not exceed 3,765 pF/MHz.
- 4) Not more than one output may be shorted at a time for maximum duration of one second.
- 5) Capacitance measured for initial qualification and when design changes may affect the value. Capacitance is measured between the designated terminal and V_{SS} at frequency of 1MHz and a signal amplitude of 50mV rms maximum.
- 6) Maximum allowable relative shift equals 50mV.
- 7) All specifications valid for radiation dose $\leq 1E6$ rads(Si).
- 8) Power does not include power contribution of any TTL output sink current.
- 9) Power dissipation specified per switching output.
- 10) This value is guaranteed based on characterization data, but not tested.

UT54ACS191/UT54ACTS191

AC Electrical Characteristics ²

($V_{DD} = 5.0V \pm 10\%$; $V_{SS} = 0V$ ¹, $-55^{\circ}C < T_c < +125^{\circ}C$); Unless otherwise noted, T_c is per the temperature range ordered.

Symbol	Parameter	Minimum	Maximum	Unit
t_{PLH}	\overline{LOAD} to Q_n	2	20	ns
t_{PHL}	\overline{LOAD} to Q_n	2	22	ns
t_{PLH}	Data In to Q_n	2	23	ns
t_{PHL}	Data In to Q_n	2	19	ns
t_{PLH}	CLK to Q_n	2	17	ns
t_{PHL}	CLK to Q_n	2	22	ns
t_{PLH}	CLK to \overline{RCO}	2	12	ns
t_{PHL}	CLK to \overline{RCO}	2	15	ns
t_{PLH}	CLK to MAX/MIN	2	22	ns
t_{PHL}	CLK to MAX/MIN	2	23	ns
t_{PLH}	D/\overline{U} to \overline{RCO}	2	16	ns
t_{PHL}	D/\overline{U} to \overline{RCO}	2	18	ns
t_{PLH}	D/\overline{U} to MAX/MIN	2	15	ns
t_{PHL}	D/\overline{U} to MAX/MIN	2	17	ns
t_{PLH}	\overline{CTEN} to \overline{RCO}	2	12	ns
t_{PHL}	\overline{CTEN} to \overline{RCO}	2	16	ns
f_{MAX}	Maximum clock frequency		63	MHz
t_{SU1}	\overline{LOAD} , \overline{CTEN} , D/\overline{U} Setup time before CLK \uparrow	12		ns
t_{SU2}	A, B, C, D setup time before \overline{LOAD} \uparrow	5		ns
t_{H1}	\overline{CTEN} and D/\overline{U} hold time after CLK \uparrow	2		ns
t_{H2} ³	A, B, C, D hold time after \overline{LOAD} \uparrow	2		ns
t_W	Minimum pulse width CLK high CLK low \overline{LOAD} low	8		ns


Notes:

- 1) Maximum allowable relative shift equals 50mV.
- 2) All specifications valid for radiation dose $\leq 1E6$ rads(Si).
- 3) Based on characterization, hold time (t_{H2}) of 0ns can be assumed if data setup time (t_{SU2}) is ≥ 10 ns. This is guaranteed, but not tested.

UT54ACS191/UT54ACTS191

Packaging

Side-Brazed Packages

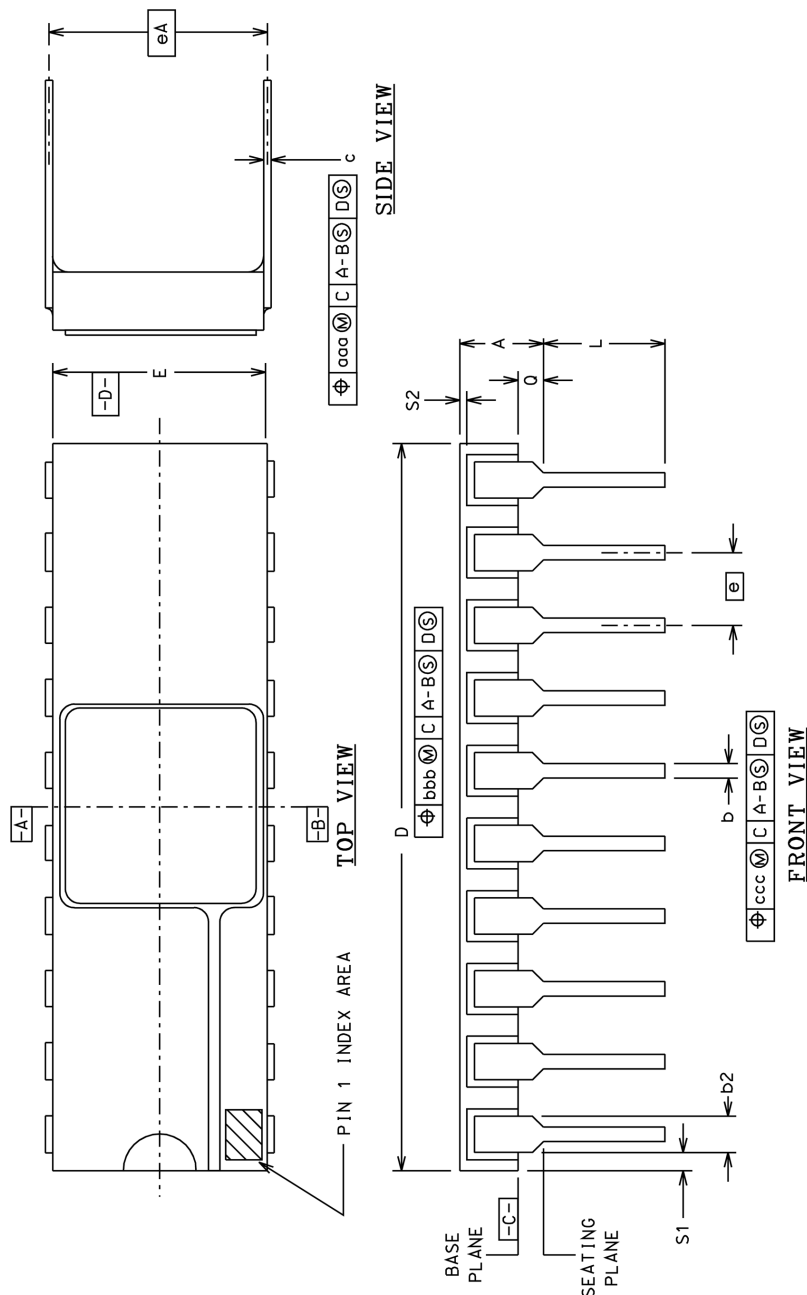


PKG CONFIG	LEAD COUNT	MIL-STD- 1835 Dwg CONF C	DIMENSION SYMBOLS															
			A	b	b2	c	D	E	e	eA	L	Q	S1	S2	000	000	000	000
-01	14	D-1	0.200	0.026	0.065	0.018	0.785	0.310	0.100	0.300	0.200	0.060	0.005	0.005	0.015	0.015	0.030	0.010
-02	16	D-2	0.200	0.026	0.065	0.018	0.840	0.310	0.100	0.300	0.200	0.060	0.005	0.005	0.015	0.015	0.030	0.010
-03	20	D-8	0.200	0.026	0.065	0.018	1.060	0.310	0.100	0.300	0.200	0.070	0.005	0.005	0.015	0.015	0.030	0.010
			0.014	0.014	0.045	0.008	0.008	0.220	BSC	BSC	0.125	0.015	0.005	0.005	0.015	0.015	0.030	0.010

Synchronous 4-Bit Up-Down Binary Counters

UT54ACS191/UT54ACTS191


Flatpack Packages

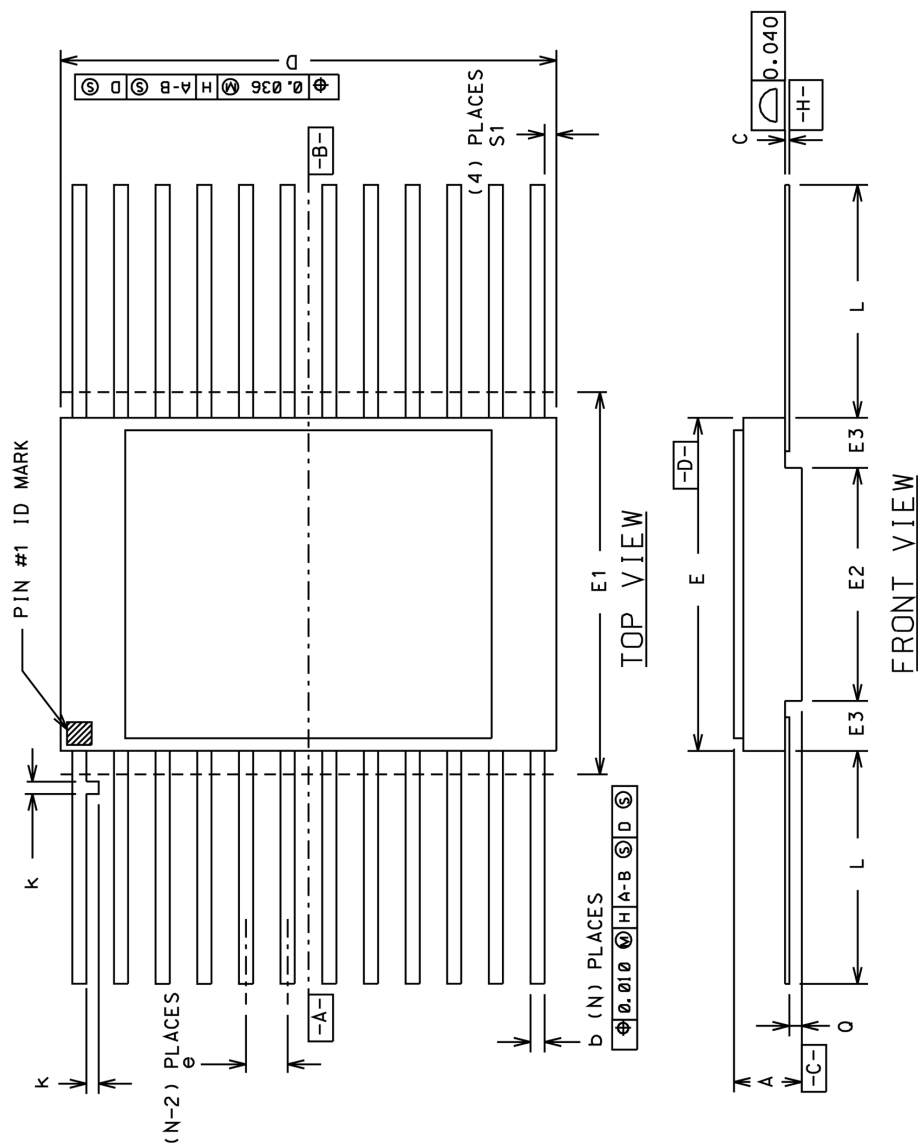

PKG CONFIG	LEAD COUNT	MIL-STD 1835 DWG CONF B	DIMENSION SYMBOLS												
			A	b	c	D	E	E1	E2	E3	e	k	L	Q	S1
-03	14	F-2A	0.115 0.045	0.022 0.015	0.009 0.004	0.390 -----	0.260 0.235	0.290 -----	-----	-----	0.050 BSC	0.015 0.008	0.370 0.270	0.045 0.026	----- 0.005
-04	16	F-5A	0.115 0.045	0.022 0.015	0.009 0.004	0.440 -----	0.285 0.245	0.315 -----	-----	0.130	0.050 BSC	0.015 0.008	0.370 0.250	0.045 0.026	----- 0.005
-05	20	F-9A	0.115 0.045	0.022 0.015	0.009 0.004	0.540 -----	0.300 0.245	0.330 -----	-----	0.130	0.050 BSC	0.015 0.008	0.370 0.250	0.045 0.026	----- 0.000

UT54ACS191/UT54ACTS191

UT54ACS191/UT54ACTS191: SMD

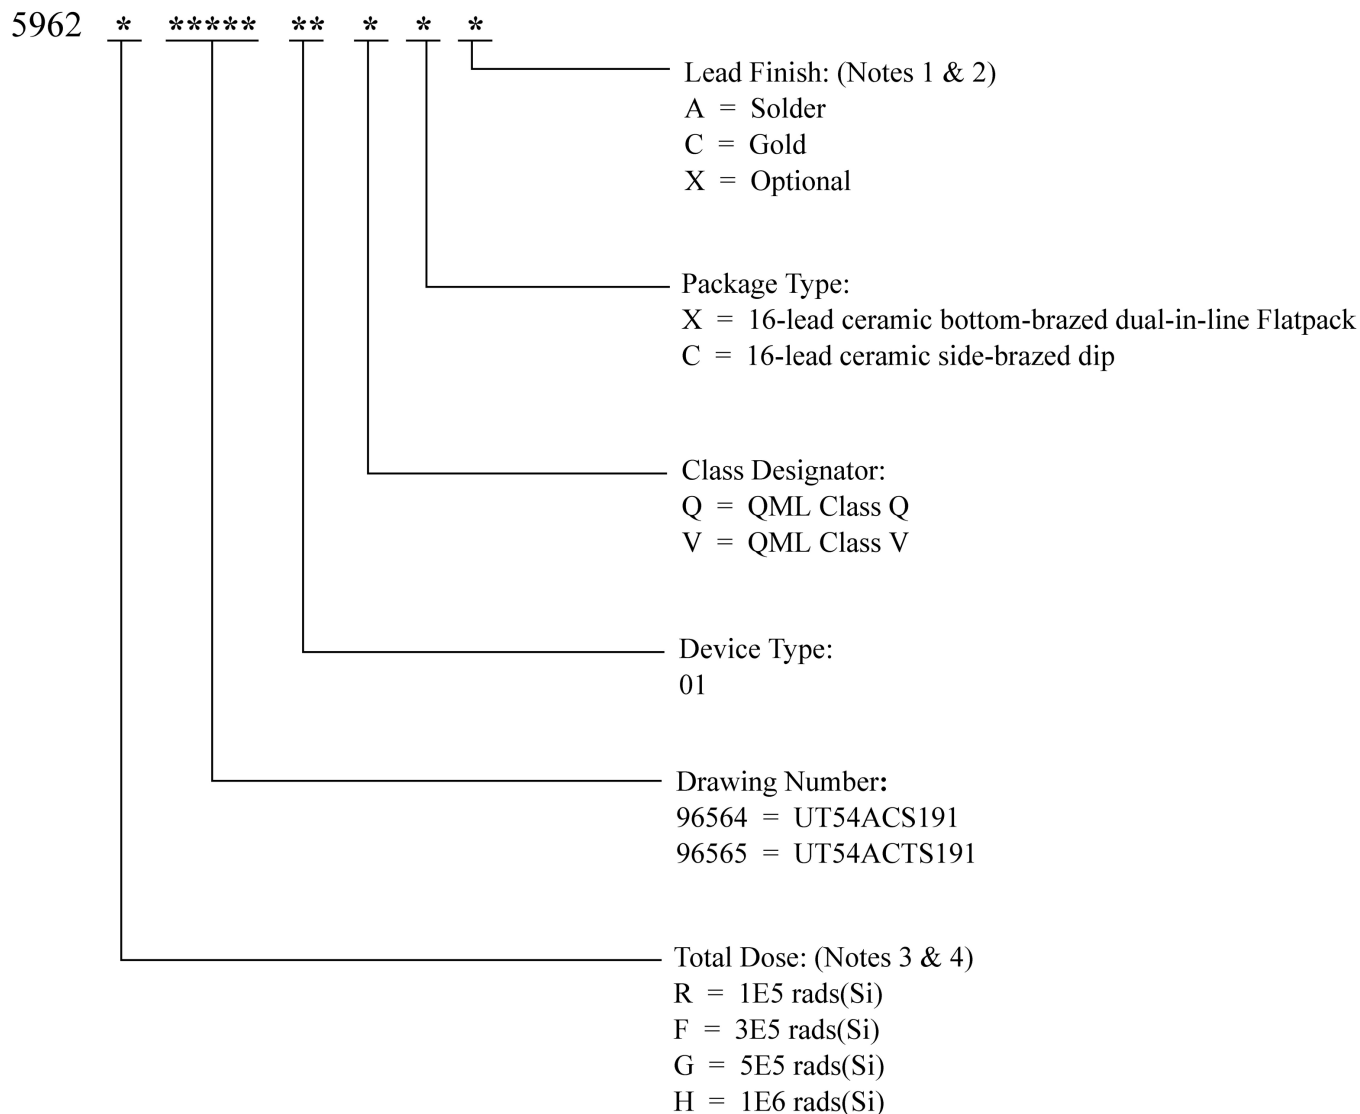

Notes:

- 1) Lead finish (A,C, or X) must be specified.
- 2) If an "X" is specified when ordering, part marking will match the lead finish and will be either "A" (solder) or "C" (gold).
- 3) Total dose radiation must be specified when ordering. QML Q and QML V not available without radiation hardening. For prototype inquiries, contact factory.
- 4) Device type 02 is only offered with a TID tolerance guarantee of 3E5 rads(Si) or 1E6 rads(Si) and is tested in accordance with MIL-STD-883 Test Method 1019 Condition A and section 3.11.2. Device type 03 is only offered with a TID tolerance guarantee of 1E5 rads(Si), 3E5 rads(Si), and 5E5 rads(Si), and is tested in accordance with MIL-STD-883 Test Method 1019 Condition A.

UT54ACS191/UT54ACTS191

Datasheet Definitions

	DEFINITION
Advanced Datasheet	CAES reserves the right to make changes to any products and services described herein at any time without notice. The product is still in the development stage and the datasheet is subject to change . Specifications can be TBD and the part package and pinout are not final .
Preliminary Datasheet	CAES reserves the right to make changes to any products and services described herein at any time without notice. The product is in the characterization stage and prototypes are available.
Datasheet	Product is in production and any changes to the product and services described herein will follow a formal customer notification process for form, fit or function changes.

The following United States (U.S.) Department of Commerce statement shall be applicable if these commodities, technology, or software are exported from the U.S.: These commodities, technology, or software were exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

Cobham Colorado Springs Inc. d/b/a Cobham Advanced Electronic Solutions (CAES) reserves the right to make changes to any products and services described herein at any time without notice. Consult an authorized sales representative to verify that the information in this data sheet is current before using this product. The company does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing; nor does the purchase, lease, or use of a product or service convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of the company or of third parties.